

Overview

On IC-talk HC Chan_SIP is the preferred option for an extension please DO NOT use PJSIP or other options unless specifically instructed to do so for a specific item. The default port number will be 5160 for Chan_SIP.

This guide walks you through information related to SIP extensions.

- This guide is for chan_sip. In Asterisk 12+ there is a PJSIP option which is not covered on this page.
- Options will vary based on installed modules. Configuration of these settings is covered by their respective user guides.

Logging in


- From the top menu click Modules / Applications
- From the drop down click Extensions

Adding a SIP Extension

There are multiple ways to add an extension but we shall show a quick method and the full comprehensive options;


Quick Create Extensions

- From the Extensions landing page click on the Quick Create Extension button.

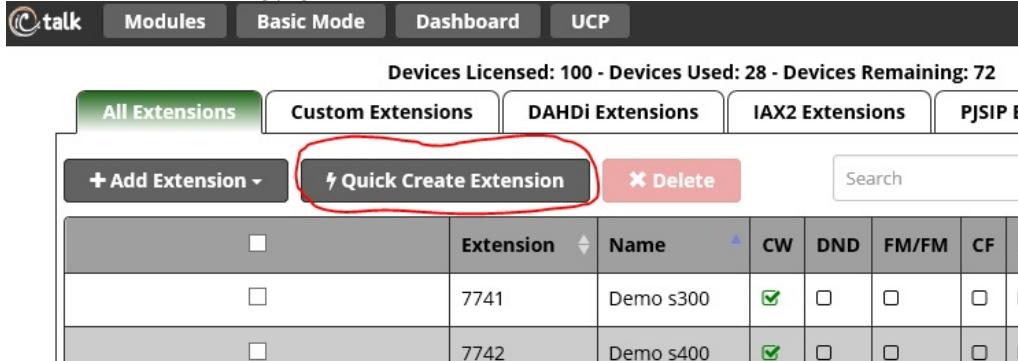

The screenshot shows the IC-talk Extensions landing page. At the top, there are tabs for 'All Extensions', 'Custom Extensions', 'DAHDI Extensions', 'IAX2 Extensions', and 'PJSIP E'. Below the tabs, there is a button labeled '+ Add Extension' and a red circle highlights the 'Quick Create Extension' button. A table below lists extensions with columns for Extension, Name, CW, DND, FM/FM, and CF. Two extensions are listed: Demo s300 and Demo s400.

- A pop up window will appear complete this with the desired details using the format shown below for full explanations of each item requested see further below in full extension configuration

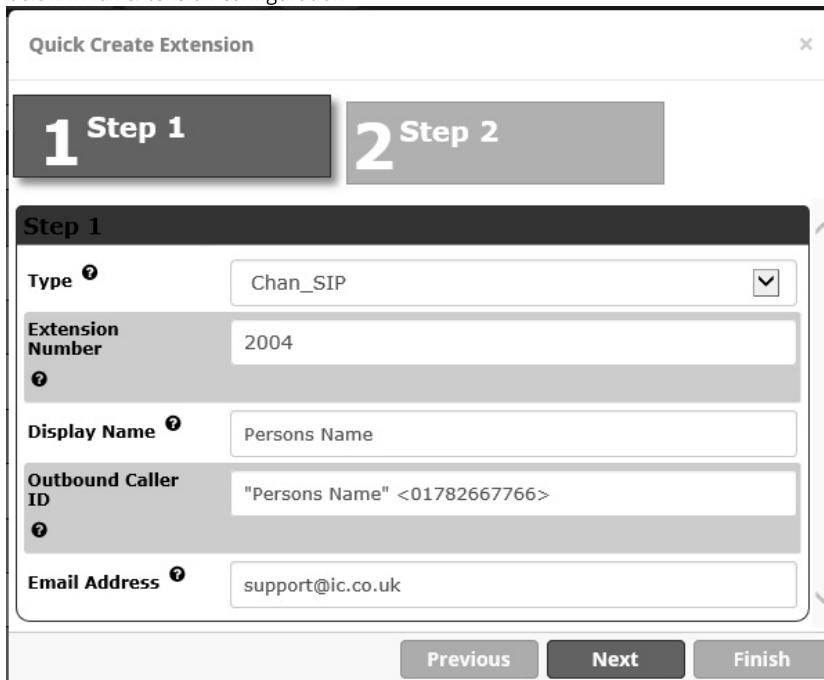

The screenshot shows the 'Quick Create Extension' pop-up window. It is divided into 'Step 1' and 'Step 2'. Step 1 contains fields for Type (Chan_SIP), Extension Number (2004), Display Name (Persons Name), Outbound Caller ID ("Persons Name" <01782667766>), and Email Address (support@ic.co.uk). Step 2 contains 'Previous', 'Next', and 'Finish' buttons.

Quick Create Extension

1 Step 1 **2 Step 2**

Step 2

Enable Find Me/Follow Me **Yes** **No**

Create User Manager User **Yes** **No**

User Manager Groups **All Users**

Enable Voicemail **Yes** **No**

Voicemail PIN **?** ********

Previous **Next** **Finish**

On pressing finish the user will be created and the password for the user will be emailed out to the email address for the user that has been specified. If using an IC-talk HC or Sangoma handset simply plug in and once booted select Login Ext on the screen, enter your extension number followed by the PIN number entered in the quick setup and your device will connect to your system.

Adding an Extension in full user mode

- From the Extensions landing page click on the Add New Chan_SIP Extension button.

General

— Add Extension

This device uses **CHAN_SIP** technology listening on Port 5160 (UDP - this is a **NON STANDARD** port)

User Extension ?

Display Name ?

Outbound CID ?

Secret ?

40fade7041866f08255f8a5798c7e027

— Language

Language Code ?

Default



— User Manager Settings

Select User Directory: ?

Link to a Default User ?

Create New User

Username ?

Use Custom Username

Password For New User ?

1d4c1acf3dd07f0ffc5a8b3e3d1e5e36

Groups ?

All Users



Submit

Reset

Add Extension

User Extension

This will be the extension number associated with this user and cannot be changed once saved. We recommend using 3- or 4-digit extension numbers.

Display Name

This is the name associated with this extension and can be edited any time. This will become the Caller ID Name. Only enter the name, NOT the number.

Outbound CID

Overrides the CallerID when dialing out a trunk. Any setting here will override the common outbound CallerID set in the Trunks module. Format: "caller name" <#####>

Leave this field blank to disable the outbound CallerID feature for this user. If you leave it blank, the system will use the route or trunk Caller ID, if set.

Secret

Password (secret) configured for the device. Should be alphanumeric with at least 2 letters and numbers to keep secure. A secret is auto-generated but you may edit it. A color-coded bar will display the strength of the secret, ranging from "really weak" to "strong."

User Manager Settings

Link to a Default User

Select a user that this extension should be linked to in the User Management module. Default = Create New User. An extension may only be linked to one user, and a user may only be linked to one extension.

- Create New User: Creates a new user in User Manager that will be linked to this extension.
- None: The extension will not be associated with a user in User Manager
- Existing User: If you have any existing users in User Manager who are not already linked to an extension, you can select one here in order to link the user to this extension.

Username

If Create New User is selected above, this will be the new user's login username. If you leave the Username field is blank (grayed-out), the username will be the same as the extension number. To customize the username, check the Use Custom Username box and enter a username.

Password for New User

If Create New User is selected above, this will be the auto-generated user's new password. A password is automatically generated, but you can edit it here.

Groups

If Create New User is selected above, or if you are linking this extension to an existing user, you can add the user to one or more groups. Groups are defined in the User Management module, so if you haven't created any groups, none will show up here. To add this user to a group, click inside the field, and available groups will show up in a menu. You can start typing to quickly find a group. Click on a group name to add it to the field. Repeat the process if you

with to enter multiple groups.

Voicemail

- Click on the Voicemail tab.
- If you wish to enable voicemail, click the Yes button next to Enabled in order to allow editing the options below.

General Voicemail Find Me/Follow Me Advanced Pin Sets Zulu Other

— Voicemail

Enabled	<input checked="" type="button"/> Yes <input type="button"/> No
Voicemail Password <small>?</small>	<input type="text"/>
Require From Same Extension <small>?</small>	<input checked="" type="button"/> Yes <input type="button"/> No
Disable (*) in Voicemail Menu <small>?</small>	<input checked="" type="button"/> Yes <input type="button"/> No
Email Address <small>?</small>	<input type="text"/>
Pager Email Address <small>?</small>	<input type="text"/>
Email Attachment <small>?</small>	<input checked="" type="button"/> Yes <input type="button"/> No
Play CID <small>?</small>	<input checked="" type="button"/> Yes <input type="button"/> No
Play Envelope <small>?</small>	<input checked="" type="button"/> Yes <input type="button"/> No
Delete Voicemail <small>?</small>	<input checked="" type="button"/> Yes <input type="button"/> No
VM Options <small>?</small>	<input type="text"/>
VM Context <small>?</small>	default

Voicemail

Enabled

Yes/No: Whether to enable voicemail for the user.

Voicemail Password

Enter the password (numbers only) the user will use to access the voicemail system. If left blank, it will default to the extension number. The user can change the password after logging into the voicemail system (*98) with a phone.

Require From Same Extension

Yes/No: Whether to require the user to enter their password after they reach the voicemail system from their own extension, by dialing *97. This option does not apply to *98 calls, which will always prompt for a password. For security purposes, a Yes setting is recommended in an environment where other users will have physical access to this extension.

Disable (*) in Voicemail Menu

Yes/No: Whether to disable access to the voicemail menu. Default = Yes. If set to Yes, a user will not be able to access the voicemail menu by pressing "*". If you have no plans to access your mailbox remotely, set this to Yes. If set to No, the user can access voicemail remotely by calling into their extension and pressing "*" to reach the menu.

Email Address

Optional - The e-mail that voicemail notifications will be sent to. Further down the page, you have the option of whether to attach the actual voicemail message to the e-mail.

Pager Email Address

Optional - A pager e-mail address or mobile email address that short voicemail notifications will be sent to.

Email Attachment

Yes/No: Whether to attach the voicemail to the e-mail notification. Requires an email address to be set above.

Play CID

Yes/No: Whether to read back the caller's telephone number prior to playing the voicemail, just after announcing the date and time the message was left.

Play Envelope

Yes/No: Whether the system will play the message envelope information (date/time) before playing the voicemail message. This setting does not affect the operation of the envelope option in the advanced voicemail menu.

Delete Voicemail

Yes/No: Whether to delete the voicemail message from the mailbox after it is e-mailed to the user. If set to Yes, this would provide functionality that allows users to receive their voicemail via e-mail alone, rather than needing to retrieve it from the web interface or a telephone.

If Delete Voicemail = Yes, then you MUST set an e-mail address for the user above, and also set Email Attachment = Yes. Otherwise, the voicemail message would be lost forever, because it would not be e-mailed, and would be deleted from the system.

VM Settings

Optional: Advanced settings. Enter voicemail options, separated by the pipe symbol (|). For example, "review=yes | maxmessage=60" May be left blank.

VM Context

This is the Voicemail Context, which is normally set to "default." Do not change unless you understand the implications.

VMX Locator™

VMX Locater is designed to help a caller reach an operator and/or find you when you are not at your main phone. If enabled, the user will want to consider recording voicemail greetings that instruct a caller on which options to press (0, 1, and/or 2).

Whenever you enter information into the 0, 1, and/or 2 options below, you should run a test to make sure the number is functional, because otherwise the caller might become stranded or receive messages about a number being invalid.

— VmX Locater™

Enabled <small>?</small>	<input type="button" value="Yes"/> <input type="button" value="No"/>
Use When: <small>?</small>	<input type="button" value="Unavailable"/> <input type="button" value="Busy"/>
Voicemail Instructions: <small>?</small>	<input type="button" value="Yes"/> <input type="button" value="No"/>
Press 0: <small>?</small>	<input type="text"/> <input checked="" type="checkbox"/> Go To Operator
Press 1: <small>?</small>	<input type="text"/>
Press 2: <small>?</small>	<input type="text"/>
<input type="button" value="Submit"/> <input type="button" value="Reset"/>	

Enabled

Yes/No: Whether to enable the VMX Locater feature. Set to Yes if you would like to enable this feature and edit the options below.

Use When

Select one or more of the buttons to enable VMX Locater for these types of greetings: Unavailable, Busy, and/or Temporary.

Voicemail Instructions

Yes/No: Whether to play instructions after playing your greeting. If set to No, only a beep will be played after your personal voicemail greeting.

Press 0

Check the Go to Operator box to send the caller to the operator when they press 0. Uncheck the Go to Operator box and enter an alternative destination if you want the caller to be sent to a different destination when they press 0. This feature is still accessible to callers even when VMX Locater is disabled for the user.

Press 1

Optional - Enter a destination to send the caller to when they press 1. This can be an internal extension, ring group, queue, or external number such as a cell phone number.

Press 2

Optional - Enter a destination to send the caller to when they press 2. This can be an internal extension, ring group, queue, or external number such as a cell phone number.

Find Me / Follow Me

- Click on the Find Me / Follow Me tab.
- Find Me / Follow Me is enabled by default here so that you may edit the settings. After entering settings, you can disable it if desired.

General Settings

Enabled	<input checked="" type="button"/> Yes <input type="button"/> No
Initial Ring Time	7
Ring Strategy	ringallv2-prim
Ring Time	20
Follow-Me List	<input type="button"/> Quick Select
Announcement	None
Play Music On Hold	Ring
CID Name Prefix	
Alert Info	None
Ringer Volume Override	None

Call Confirmation Configuration

Confirm Calls	<input checked="" type="button"/> Yes <input type="button"/> No
Remote Announce	Default
Too-Late Announce	Default

Change External CID Configuration

Mode	Default
Fixed CID Value	

Destinations

No Answer	Follow Me
	Normal Extension Behavior

General Settings

Enabled

Yes/No: Whether to enable Find Me / Follow Me. Must be set to Yes (at least temporarily) in order to edit other settings on this page. If you leave it set to Yes, Find Me / Follow Me will be active for this extension when you save the extension and apply config. You can set to No to disable Find Me / Follow Me for an extension until the user activates it.

Initial Ring Time

Use the drop-down menu to select initial ring time, in seconds. This is the number of seconds to ring the primary extension prior to proceeding to the follow-me list. If "0," the primary extension will not be rung before proceeding to the follow-me list. The extension can also be included in the follow-me list.

Ring Strategy

- ringallv2: ring Extension for duration set in Initial Ring Time, and then, while continuing call to extension, ring Follow-Me List for duration set in Ring Time.
- ringall: ring Extension for duration set in Initial Ring Time, and then terminate call to Extension and ring Follow-Me List for duration set in Ring Time.
- hunt: take turns ringing each available extension
- memoryhunt: ring first extension in the list, then ring the 1st and 2nd extension, then ring 1st 2nd and 3rd extension in the list.... etc.
- *-prim: these modes act as described above. However, if the primary extension (first in list) is occupied, the other extensions will not be rung. If the primary is in do-not-disturb (DND) mode, it won't be rung. If the primary is in call forward (CF) unconditional mode, then all will be rung.
- firstavailable: ring only the first available channel
- firstnotonphone: ring only the first channel which is not off hook - ignore CW

Ring Time

Time in seconds that the phones will ring. For all hunt-style ring strategies, this is the time for each iteration of phone(s) that are rung.

Follow-Me List

Enter a list of extensions to ring, one per line, or use the Extension Quick Pick menu below. You can include an extension on a remote system, or an external number, by suffixing a number with a hash (#). ex: 2448089# would dial 2448089 on the appropriate trunk (see Outbound Routing).

Extension Quick Pick

This drop-down menu gives you the option to select existing extensions to add to the Follow-Me List above.

Announcement

Select the message to be played to the caller before dialing the find me / follow me list. Default = none. The drop-down menu shows available system recordings. To add additional recordings, please use the System Recordings module.

Play Music On Hold

If you select a Music on Hold class to play, instead of the default "Ring," the caller will hear that MoH instead of ringing while they are waiting for someone to pick up.

CID Name Prefix

Optional - You can optionally prefix the Caller ID name when ringing extensions in this group. For example, if you prefix with "Sales:", a call from John Doe would display as "Sales:John Doe" on the find me / follow me list extensions that ring.

Alert Info

Optional - You can optionally include an Alert Info, which can create distinctive rings on SIP phones.

Call Confirmation Configuration

Confirm Calls

Yes/No: Whether to confirm external calls. Call confirmation requires the remote party to press 1 to accept the call. This can help prevent an unanswered find me / follow me call from reaching an external voicemail box. This feature only works with the ringall or ringall-prim ring strategies.

Remote Announce

Message to be played to the person receiving the call if Confirm Calls = Yes. You can use the default message or select one of your System Recordings.

Too-Late Announce

Message to be played to the person receiving the call if Confirm Calls = Yes and the call has already been accepted elsewhere.

Change External CID Configuration

Mode

- Default: Transmits the caller's CID if allowed by the trunk.
- Fixed CID Value: Always transmit the Fixed CID Value below.
- Outside Calls Fixed CID Value: Transmit the Fixed CID Value below on calls that come in from outside only. Internal extension-to-extension calls will continue to operate in default mode.
- Use Dialed Number: Transmit the number that was dialed as the CID for calls coming from outside. Internal extension-to-extension calls will continue to operate in default mode. There must be a DID on the inbound route for this. This will be BLOCKED on trunks that block foreign CallerID.
- Force Dialed Number: Transmit the number that was dialed as the CID for calls coming from outside. Internal extension-to-extension calls will continue to operate in default mode. There must be a DID on the inbound route for this. This WILL be transmitted on trunks that block foreign CallerID.

Fixed CID Value

Fixed value to replace the CID used with some of the modes above. Should be in a format of digits only with an option of E164 format using a leading "+".

Destinations

No Answer

Optional destination call is routed to when the call is not answered on an otherwise idle phone. If the phone is in use and the call is simply ignored, then the busy destination will be used.

Remember to set Enabled = No at the top of the page after you're done changing settings if you do not want find me / follow me to be active. Otherwise, it will be active for the extension after you save settings and apply config.

Advanced

- Click on the Advanced tab.
- There are many settings in this tab. See below for explanations of the options.

The screenshot shows a software interface for managing SIP extensions. At the top, there's a navigation bar with tabs for 'Modules', 'Basic Mode', 'Dashboard', and 'UCP'. Below the navigation is a search bar with a magnifying glass icon. The main content area is titled 'Add SIP Extension' and has a sub-section titled 'Assigned DID/CID'. This sub-section contains three input fields: 'DID Description' with a placeholder 'DID Description', 'Add Inbound DID' with a placeholder 'Add Inbound DID', and 'Add Inbound CID' with a placeholder 'Add Inbound CID'. Above these fields is a small minus sign icon followed by the text 'Assigned DID/CID'. The 'Advanced' tab is currently selected, indicated by a green background and white text. Other tabs visible include 'General', 'Voicemail', 'Find Me/Follow Me', 'Pin Sets', 'Zulu', and 'Other'. The overall layout is clean and organized, typical of a web-based configuration tool.

Assigned DID/CID

DID Description

A description for this DID, such as "Fax"

Add Inbound DID

A DID that is directly associated with this extension. The DID should be in the same format as provided by the provider (e.g. full number, 4 digits for 10x4, etc). Format should be: XXXXXXXXX

Add Inbound CID

Add a CID for more specific DID + CID routing. A DID must be specified in the above Add Inbound DID field. In addition to standard dial sequences, you can also enter Private, Blocked, Unknown, Restricted, Anonymous, Withheld, and Unavailable in order to catch these special cases if the Telco transmits them.

Add Extension

DTMF Signaling		RFC 2833
Can Reinvite	<input checked="" type="button"/> No <input type="button"/> Yes <input type="button"/> nonat <input type="button"/> update	
Context	from-internal	
Host	dynamic	
Default User		
Trust RPID	<input checked="" type="button"/> No <input type="button"/> Yes	
Send RPID	Send P-Asserted-Identity header	
Connection Type	friend	
Session Timers	Accept	
NAT Mode	Yes - (force_rport,comedia)	
Port	5060	
Qualify	yes	
Qualify Frequency	60	
Transport	All - UDP Primary	
Enable AVPF	<input checked="" type="button"/> No <input type="button"/> Yes	
Force AVP	<input checked="" type="button"/> No <input type="button"/> Yes	
Enable ICE Support	<input checked="" type="button"/> No <input type="button"/> Yes	

Add Extension

DTMF Signaling

The DTMF signaling mode used by this device, usually RFC for most phones. [dtmfmode]

Can Reinvite

No/Yes/nonat/update: Re-Invite policy for this device, see Asterisk documentation for details. [canreinvite]

Context

Asterisk context this device will send calls to. Only change this if you know what you are doing. [context]

Host

Host settings for this device, almost always dynamic for endpoints. [host]

Trust RPID

Whether Asterisk should trust the RPID settings from this device. Usually should be yes for CONNECTEDLINE() functionality to work if supported by the endpoint. [trustrpid]

Send RPID

Whether Asterisk should send RPID (or PAI) info to the device. Usually should be enabled to the settings used by your device for CONNECTEDLINE() functionality to work if supported by the endpoint. [sendrpriid]

Connection Type

Asterisk connection type, usually friend for endpoints. [type]

NAT Mode

NAT setting, see Asterisk documentation for details. Yes usually works for both internal and external devices. Set to No if the device will always be internal. [nat]

- Yes - (force_rport,comedia): Always ignore info and assume NAT
- No - (no): Use NAT mode only according to RFC3581 (rport)
- Force rport - (force_rport): Force rport to always be on.
- comedia - (comedia): Use rport if the remote side says to use it and perform comedia RTP handling.

- o Automatic Force Both - (auto_force_rport,auto_comedia): See Below
- o Automatic Force rport - (auto_force_rport): Force rport if Asterisk detects that an incoming SIP request crossed a NAT after being sent by the remote endpoint.
- o Automatic comedia - (auto_comedia): Use comedia if Asterisk detects that an incoming SIP request crossed a NAT after being sent by the remote endpoint.
- o never - (no): Never attempt NAT mode or RFC3581 support
- o route - (force_rport): Assume NAT, don't send rport

Port

Endpoint port number to use, usually 5060. Some 2-port devices such as ATA may use 5061 for the second port.

Qualify

Setting to yes (equivalent to 2000 msec) will send an OPTIONS packet to the endpoint periodically (default every minute). Used to monitor the health of the endpoint. If delays are longer than the qualify time, the endpoint will be taken offline and considered unreachable. Can be set to a value which is the msec threshold. Setting to no will turn this off. Can also be helpful to keep NAT pinholes open.

Qualify Frequency

Frequency in seconds to send qualify messages to the endpoint.

Transport

This sets the allowed transport settings for this device and the default (Primary) transport for outgoing. The default transport is only used for outbound messages until a registration takes place. During the peer registration the transport type may change to another supported type if the peer requests so. In most common cases, this does not have to be changed as most devices register in conjunction with the host=dynamic setting. If you are using TCP and/or TLS you need to make sure the general SIP Settings are configured for the system to operate in those modes and for TLS, proper certificates have been generated and configured. If you are using websockets (such as WebRTC) then you must select an option that includes WS.

Enable AVPF

Whether to Enable AVPF. Defaults to no. The WebRTC standard has selected AVPF as the audio video profile to use for media streams. This is not the default profile in use by Asterisk. As a result the following must be enabled to use WebRTC.

Force AVP

Force 'RTP/AVP', 'RTP/AVPF', 'RTP/SAVP', and 'RTP/SAVPF' to be used for media streams when appropriate, even if a DTLS stream is present.

Enable ICE Support

Whether to Enable ICE (Interactive Connectivity Establishment) Support. Defaults to no. ICE is a protocol for Network Address Translator (NAT) traversal for UDP-based multimedia sessions established with the offer/answer model. This option is commonly enabled in WebRTC setups.

Enable Encryption

Whether to offer SRTP encrypted media (and only SRTP encrypted media) on outgoing calls to a peer. Calls will fail with HANGUPCAUSE=58 if the peer does not support SRTP. Defaults to no.

Call Groups

Callgroup(s) that this device is part of. Can be one or more callgroups, e.g. "1,3-5" would be in groups 1,3,4,5.

Pickup Groups

Pickupgroups(s) that this device can pickup calls from. Can be one or more groups, e.g. '1,3-5' would be in groups 1,3,4,5. Device does not have to be in a group to be able to pick up calls from that group.

Disallowed Codecs

Disallowed codecs. Set this to "all" to remove all codecs defined in the general settings, and then specify specific codecs separated by "&" on the "allow" setting, or just disallow specific codecs separated by "&".

Allowed Codecs

Allow specific codecs, separated by the "&" sign and in priority order. E.g. "ulaw&g729". Codecs allowed in the general settings will also be allowed unless removed with the "disallow" directive above.

Dial

How to dial this device. This should not be changed unless you know what you are doing.

Account Code

Account code for this device.

Mailbox

Mailbox for this device. This should not be changed unless you know what you are doing. This will be automatically set to: <extnum>@device

With an LDAP backend, to enable MWI (Message waiting indication), enter a semi-colon list of mailboxes in the form <extnum>@default

e.g. 101@default;102@default ...where the message lamp will light if any of the specified mailboxes has unread mail

Voicemail Extension

Asterisk dialplan extension to reach voicemail for this device. Some devices use this to auto-program the voicemail button on the endpoint. If left blank, the default vmexten setting is automatically configured by the voicemail module. Only change this on devices that have special needs.

Deny

IP Address range to deny access to, in the form of network/netmask.

Permit

IP Address range to allow access to, in the form of network/netmask. This can be a very useful security option when dealing with remote extensions that are at a known location (such as a branch office) or within a known ISP range for some home office situations.

CID Num Alias

The CID Number to use for internal calls, if different from the extension number. This is used to masquerade as a different user. A common example is a team of support people who would like their internal CallerID to display the general support number (a ringgroup or queue). There will be no effect on external calls.

SIP Alias

If you want to support direct sip dialing of users internally or through anonymous sip calls, you can supply a friendly name that can be used in addition to the users extension to call them.

Extension Options

Asterisk Dial Options	
Ttr	
<input type="checkbox"/> Override	
Ring Time	Default
Ringer Volume Override	None
Call Forward Ring Time	Default
Outbound Concurrency Limit	5
Call Waiting	Enable Disable
Call Screening	Disable
Emergency CID	
Internal Auto Answer	Disable Intercom
Intercom Mode	Enabled Disabled
Queue State Detection	Use State

Extension Options

Asterisk Dial Options

Cryptic Asterisk Dial Options. Check the override box to customize for this extension, or un-check to use system defaults set in Advanced Options. These will not apply to trunk options, which are configured with the trunk.

Ring Time

Number of seconds to ring prior to going to the "no answer" destination. Default will use the global default value set in Advanced Settings. If no voicemail is configured this will be ignored.

Call Forward Ring Time

Number of seconds to ring during a Call Forward, Call Forward Busy or Call Forward Unavailable call prior to continuing to voicemail or specified destination. Setting to Always will cause the phone to just continue to ring without going to the "no answer" destination. Default will use the current Ring Time. If voicemail is disabled and a destination is not specified, it will be forced into Always mode.

Outbound Concurrency Limit

Maximum number of outbound simultaneous calls that an extension can make. This is also very useful as a security protection against a system that has been compromised. It will limit the number of simultaneous calls that can be made on the compromised extension.

Call Waiting

Enable/Disable: Set the initial/current Call Waiting state for this user's extension. If disabled, a second concurrent incoming call would be sent to this extension's "busy" destination.

Internal Auto Answer

Disable/Intercom: When set to Intercom, calls to this extension/user from other internal users act as if they were intercom calls meaning they will be auto-answered if the endpoint supports this feature and the system is configured to operate in this mode. All the normal white list and black list settings will be honored if they are set. External calls will still ring as normal, as will certain other circumstances such as blind transfers and when a Follow Me is configured and enabled. If Disabled, the phone rings as a normal phone.

Call Screening

Call Screening requires external callers to say their name, which will be played back to the user and allow the user to accept or reject the call. Screening with memory only verifies a caller for their CallerID once. Screening without memory always requires a caller to say their name. Either mode will always announce the caller based on the last introduction saved with that CallerID. If any user on the system uses the memory option, when that user is called, the caller will be required to re-introduce themselves and all users on the system will have that new introduction associated with the caller's CallerID.

Pinless Dialing

Enabling Pinless Dialing will allow this extension to bypass any PIN codes normally required on outbound calls.

Emergency CID

This Caller ID will always be used when dialing out an Outbound Route that is designated as an "Emergency" route (i.e. when dialing 911). The Emergency CID overrides all other CallerID settings.

Queue State Detection

If this extension is part of a queue, then the queue will attempt to use the user's extension state or device state information when determining if this queue member should be called. In some uncommon situations, such as a Follow-Me with no physical device, or some virtual extension scenarios, the state information will indicate that this member is not available even when it is available. Setting this to Ignore State will make the queue ignore all state information, thus always trying to contact this member. Certain side effects can occur when this route is taken due to the nature of how queues handle local channels. For example, subsequent transfers will continue to show the member as busy until the original call is terminated. In most cases, this should be set to Use State.

Recording Options

Inbound External Calls	Force	Yes	Don't Care	No	Never
Outbound External Calls	Force	Yes	Don't Care	No	Never
Inbound Internal Calls	Force	Yes	Don't Care	No	Never
Outbound Internal Calls	Force	Yes	Don't Care	No	Never
On Demand Recording	Disable	Enable	Override		
Record Priority Policy	10				<input type="button" value="▼"/>

Recording Options

Inbound External Calls

Force/Yes/Don't Care/No/Never: Recording of inbound calls from external sources.

Outbound External Calls

Force/Yes/Don't Care/No/Never: Recording of outbound calls to external sources.

Inbound Internal Calls

Force/Yes/Don't Care/No/Never: Recording of calls received from other extensions on the system.

Outbound Internal Calls

Recording of calls made to other extensions on the system.

On Demand Recording

Disable/Enable/Override: Enable or disable the ability to do on demand (one-touch) recording. The overall calling policy rules still apply, and if calls are already being recorded by "Force" or "Never," the cannot be paused unless "Override" is selected.

Record Priority Policy

This is the call recording policy priority relative to other extensions when there is a conflict (i.e. one extension wants to record and the other extension does not). The higher of the two priorities determines the policy. If the two priorities are equal, the global policy (caller or callee) determines the policy.

Dictation Services

Dictation Service	Disabled	<input type="button" value="▼"/>
Dictation Format	WAV	<input type="button" value="▼"/>
Email Address	<input type="text"/>	
From Address	<input type="text"/>	

Dictation Services

Dictation Service

Disabled/Enabled: Whether Dictation service is available for this extension.

Dictation Format

Audio format to use for dictation (Ogg Vorbis, GSM, or WAV).

Email Address

The email address that completed dictations are sent to.

From Address

The email address that completed dictations are sent from. Format is "A Persons Name <email@address.com (http://address.com/)>", without quotes, or just a plain email address.

— Default Group Inclusion

Default Directory 

Exclude 

— DTLS

Enable DTLS 

No 

Use Certificate 

default 

DTLS Verify 

Fingerprint 

DTLS Setup 

Act/Pass 

DTLS Rekey Interval 

0

DTLS

(Datagram Transport Layer Security)

Enable DTLS

No/Yes: Enable or disable DTLS-SRTP support.

Use Certificate

The Certificate to use from Certificate Manager

DTLS Verify

Verify that provided peer certificate and fingerprint are valid.

- Yes: Perform both certificate and fingerprint verification
- No: Perform no certificate or fingerprint verification
- Fingerprint: Perform ONLY fingerprint verification
- Certificate: Perform ONLY certificate verification

DTLS Setup

Whether we are willing to accept connections, connect to the other party, or both. This value will be used in the outgoing SDP when offering and for incoming SDP offers when the remote party sends actpass

- Active: we want to connect to the other party
- Passive: we want to accept connections only
- Act/Pass: we will do both

DTLS Rekey Interval

Interval at which to renegotiate the TLS session and rekey the SRTP session. If this is not set or the value provided is 0 rekeying will be disabled.

— Optional Destinations

No Answer 

Unavail Voicemail if Enabled 

CID Prefix 

Busy 

Busy Voicemail if Enabled 

CID Prefix 

Not Reachable 

Unavail Voicemail if Enabled 

CID Prefix 

 Submit 



iC-Talk HC is licensed GPLv3

Optional Destinations

No Answer

Optional destination call is routed to when the call is not answered on an otherwise idle phone. If the phone is in use and the call is simply ignored, then the busy destination will be used instead.

CID Prefix

Optional CID Prefix to add before sending to this no answer destination.

Busy

Optional destination the call is routed to when the phone is busy or the call is rejected by the user. This destination is also used on an unanswered call if the phone is in use and the user chooses not to pick up the second call.

CID Prefix

Optional CID Prefix to add before sending to this busy destination.

Not Reachable

Optional destination the call is routed to when the phone is offline, such as a softphone currently off or a phone unplugged.

CID Prefix

Optional CID Prefix to add before sending to this not reachable destination.

Other

— Endpoint

Brand 	Select 
MAC 	
Template 	Select Brand First 
Model 	Select Brand First 
Account 	Account 1 

Endpoint

Brand

Brand of device to be provisioned

MAC

MAC Address of device to be provisioned

Template

Template to use for device

Model

Model of device to be provisioned

Account

Account number to be assigned

— XactView Settings

Add to XactView 	yes  no 
Auto Answer 	yes  no 

XactView Settings

Add to XactView

yes/no: Whether to Makes this extension available in XactView

Auto Answer

yes/no: Whether to make this extension automatically answer the initial call received from the system when performing an origination within XactView. Only works with Aastra, Grandstream, Linksys, Polycom, Sangoma and Snom phones.

— Default Group Inclusion

Default Page Group 	Exclude 
Default VMblast Group 	Exclude 

— Device Options

Parkinglot 	Default Lot 
--	---

— Paging and Intercom

Intercom Override 	Reject  Ring  Force 
---	---

Default Group Inclusion

Default Page Group

Exclude/Include: Whether this extension/device will be part of the default page group.

Default VMblast Group

Exclude/Include: Whether this extension/device will be part of the default voicemail blast group. Include will be ignored if the user does not have a voicemail box.

Device Options

Parkinglot

Choose a default Parking Lot for this extension.

Saving the Extension

- Click the Submit button
- Click the Apply Config button

Posted by: Mark Simcoe - Tue, Aug 1, 2017 at 5:10 PM. This article has been viewed 7951 times.

Online URL: <https://kb.ic.uk/article/extensions-sip-110.html> (<https://kb.ic.uk/article/extensions-sip-110.html>)